



Model 33A

Talent Amplifier

Key Features:

- Controls allow mix of Channels 1 and 2
- 1/4-inch and 3.5 mm output connectors
- Excellent audio quality
- Low DC power consumption
- Compatible with Model 2 Central Controller
- Compact, lightweight package
- Update of the popular Model 33


Overview

The Model 33A Talent Amplifier is a self-contained listen-only “belt pack” unit intended for use by on-air talent or production personnel. It's directly compatible with the Studio Technologies Model 2 Central Controller as well as other standard IFB or party-line intercom circuits. The Model 33A is powered by, and receives audio from, the connected IFB or intercom circuit. A single 3-conductor microphone-type cable links the Model 2's talent amplifier output with the Model 33A's input. Each Model 33A contains both a male and a female 3-pin XLR-type connector, allowing simple “loop through” connection of multiple units. Up to four talent amplifiers can be connected to, and powered by, a single Model 2 Central Controller. The Model 33A's output is intended to be connected to talent earpieces or

headsets. For flexibility the audio output is provided on both 1/4-inch and 3.5 mm jacks. An LED indicator lights whenever input power is present, providing setup assistance and user confidence. The Model 33A is housed in a lightweight, yet rugged, aluminum housing. A belt clip allows it to be directly attached to clothing or accessories. An optional mounting adapter is available to allow the Model 33A to be installed in a permanent location.

The Model 33A is unique in that a “mix” of IFB channels 1 and 2 can be created. Two level controls, along with a source select switch, allows camera and production personnel to hear IFB cues from either or both channels. This allows IFB signals intended for both technician and talent to be simultaneously monitored. By design, the Model 33A's level controls cannot be set to fully attenuate (“mute”) the audio output. This helps to minimize the chance that users will accidentally miss important “cues” from directors or producers. While audio quality is not normally considered a factor in IFB or intercom systems, the Model 33A is built to “pro audio” standards. This helps to ensure that the best possible audio reproduction is provided.

The Model 33A is an update of the popular Model 33 Talent Amplifier. The Model 33A includes the addition of a 3.5 mm output jack, along with updated internal circuitry. In all ways the Model 33A meets or exceeds the performance of its predecessor.

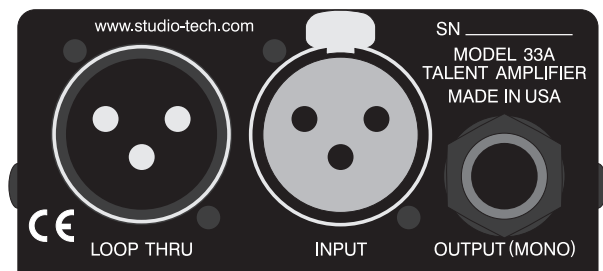

The Model 33A is compatible with virtually every standard IFB and party-line intercom circuit, including those associated with equipment from RTS®, Clear-Com®, and Studio Technologies. This type of circuit typically uses a 3-pin XLR-type connector for interfacing with connected equipment. Electrically, XLR pin 1 serves as common for DC power and audio; pin 2 provides DC power and, in the case of a dual-channel circuit, DC power and channel 1 audio; pin 3 provides channel 2 audio for dual-channel systems, or channel 1 audio in single-channel systems.

Specifications

Applications: directly compatible with talent amplifier output on Model 2 Central Controller; also compatible with standard single- and dual-channel IFB and party-line intercom circuits

Connectors:

Input: 3-pin female XLR-type

Loop Through: 3-pin male XLR-type

Output: ¼-inch and 3.5 mm 2-conductor jacks; sleeve common, tip “hot,” ring not used

IFB/Intercom Input Wiring Scheme:

Pin 1: common for DC and audio

Pin 2: DC with channel 1 audio (dual-channel circuits) or DC only (single-channel circuits)

Pin 3: channel 1 audio (single-channel circuits) or channel 2 audio (dual-channel circuits)

Power Requirement: 18-35 volts DC, 15 milliamperes quiescent, 40 milliamperes maximum

Output:

Compatibility: intended for connection to mono (2-conductor) headsets or earpieces with nominal impedance of 150 ohms or greater

Type: voltage driver

Input/Output Gain: 28 dB, maximum

Maximum Output Voltage: 8 volts peak-to-peak, 1 kHz, 150 ohm load

Frequency Response: 40 Hz-20 kHz, ±1 dB, 150 ohm load

Distortion (THD+N): 0.03%, 1 kHz, 150 ohm load, 0 dBu out

Options: mounting adapter allows Model 33A to be permanently mounted

Dimensions (Overall):

3.25 inches wide (8.3 cm)

1.8 inches high (4.6 cm)

3.95 inches deep (10.0 cm)

Weight: 0.6 pounds (0.3 kg)

Specifications subject to change without notice.

© by Studio Technologies, Inc., November 2009

Studio Technologies, Inc.

Skokie, Illinois USA

+1 847-676-9177

studio-tech.com